



SKD-2 FLOW CONTROLLER

PRODUCT CATALOGUE



FLOW CONTROL SWITCH

Operation and Application

The SKD-2 flow control switch initiates the pump automatically upon pressure drop (e.g., when taps are opened) and halts it when there is no flow or water scarcity (e.g., when taps are closed). This switch is suitable for both potable water and non-potable water piping systems.

Operating limits

Flow from 0 to 6mS/h.

Pipe Water Temperature: 0 - 60°C (but not frozen)

Ambient Temperature: 0 - 45°C


Technical features

Rated Voltage:	220VAC, 50Hz
Maximum current:	10 A
Protection grade:	IP65
Starting pressure:	1.5 bar
Maximum pressure:	10 bar
Inlet/outlet size:	(1" x 1") BSP

MODEL	INPUT VOLTAGE	FREQUENCY	CURRENT	POWER	
	(V)	(Hz)	(A)	(W)	(HP)
SKD-2	220	50	10	1500	2



Sectional drawing

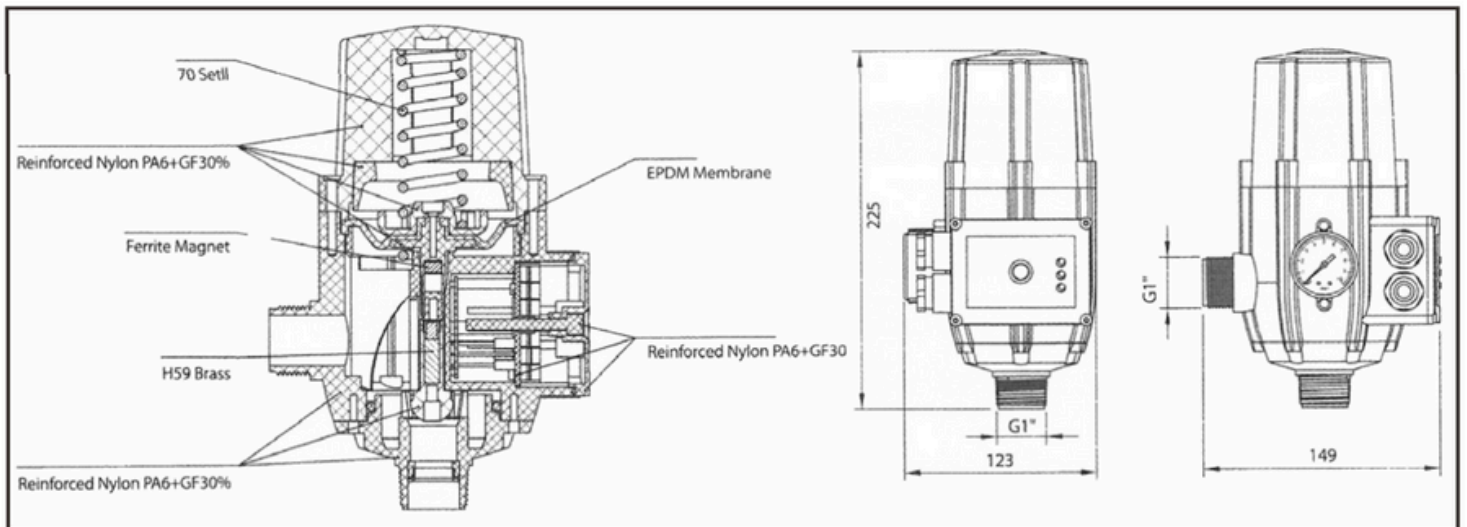



+27 62 375 5088



+27 65 321 5803



<https://www.thewatersolarcompany.co.za/>



<https://maps.app.goo.gl/MBR2LMW3T6f9TtHV9>



<https://www.facebook.com/watersolarcompany>



<https://www.youtube.com/@TheWaterSolarCompany/>



<https://www.instagram.com/watersolarcompany2023/>